


## EP10100T-RL SCHOTTKY RECTIFIER


### Features

- 175°C TJ operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- AEC-Q101 qualified (Automotive grade with suffix "Q".)
- Expsemi electronics

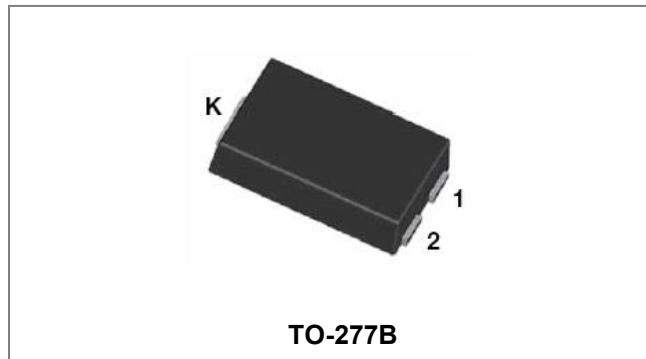

### Applications

- Switching power supply
- Converters
- Free-Wheeling diodes
- Reverse battery protection



### Maximum Ratings:

Characteristics	Symbol	Condition	Max.	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	-	100	V
Average Rectified Forward Current	$I_F \text{ (AV)}$	50% duty cycle @ $T_L = 125^\circ\text{C}$ , rectangular wave form	10	A
Peak One Cycle Non-Repetitive Surge Current	$I_{FSM}$	8.3ms, Half Sine pulse, $T_J = 25^\circ\text{C}$	250	A

### Electrical Characteristics:

Characteristics	Symbol	Condition	Typ.	Max.	Units
Forward Voltage Drop*	$V_{F1}$	@ 10A, Pulse, $T_J = 25^\circ\text{C}$	0.98	1.1	V
	$V_{F2}$	@ 10A, Pulse, $T_J = 125^\circ\text{C}$	0.85	0.94	V
Reverse Current*	$I_{R1}$	@ $V_R = \text{rated } V_R$ $T_J = 25^\circ\text{C}$	0.5	2	uA
Reverse Current*	$I_{R2}$	@ $V_R = \text{rated } V_R$ $T_J = 125^\circ\text{C}$	15	150	uA

\* Pulse width < 300  $\mu\text{s}$ , duty cycle < 2%

## Thermal-Mechanical Specifications:

Characteristics	Symbol	Condition	Specification	Units
Junction Temperature	$T_J$	-	-55 to +175	°C
Storage Temperature	$T_{stg}$	-	-55 to +175	°C
Typical Thermal Resistance Junction to Ambient (NOTE1)	$R_{\theta JA}$	DC operation	75	°C/W
Typical Thermal Resistance Junction to Lead (NOTE1)	$R_{\theta JL}$	DC operation	8	°C/W
Approximate Weight	wt	-	0.08	g

**NOTE: 1.** Units mounted on P.C.B., 0.5 x 0.5" (30 x 30mm) copper pads.

## Ratings and Characteristics Curves

Fig.1:Maximum Forward Current Derating Curve

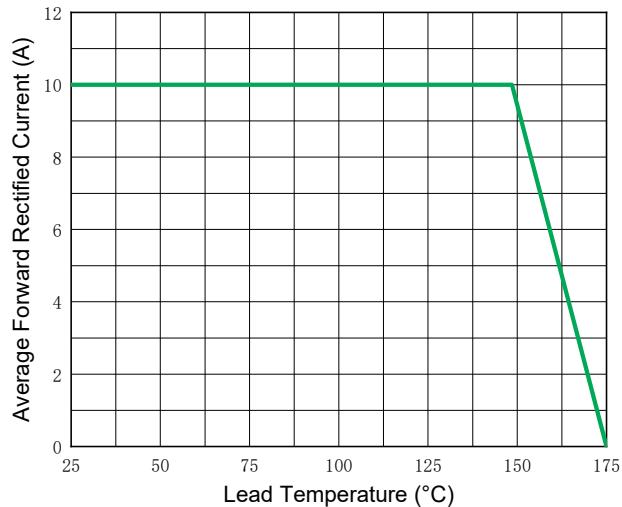


Fig.2:Forward Surge Current Capability

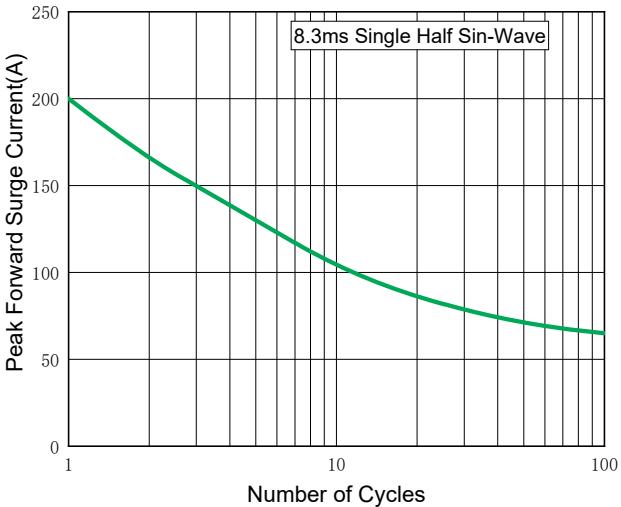


Fig.3:Typical Instantaneous Forward Characteristics



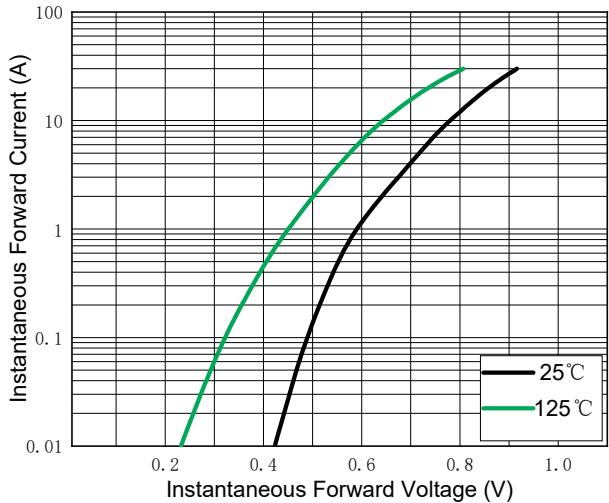


Fig.4:Typical Reverse Characteristics

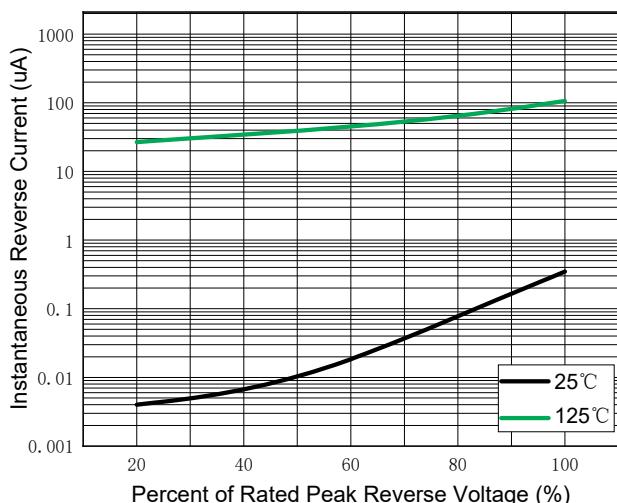


## Mechanical Dimensions TO-277B

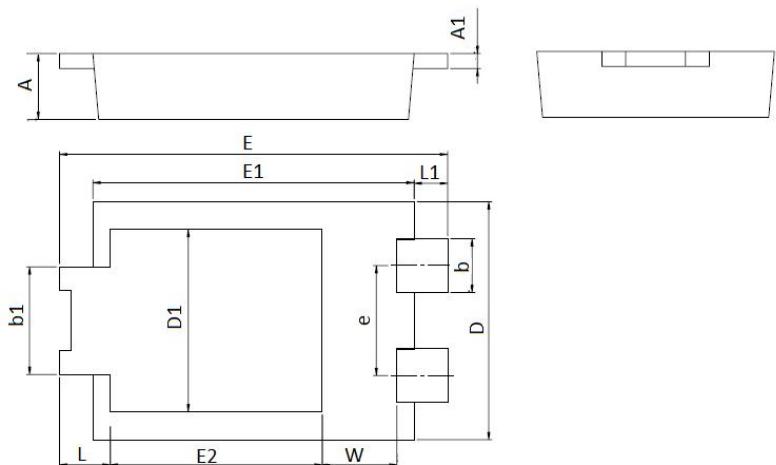

SYMBOL	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.25	0.035	0.049
A1	0.20	0.35	0.008	0.014
b	0.85	0.95	0.033	0.037
b1	1.70	1.90	0.067	0.075
D	3.80	4.30	0.150	0.170
D1	2.90	3.40	0.114	0.134
e	1.50	2.10	0.059	0.076
E	6.30	6.70	0.248	0.264
E1	5.28	5.78	0.208	0.227
E2	3.20	3.90	0.126	0.154
L	0.50	1.10	0.020	0.043
L1	0.41	1.00	0.016	0.039
W	1.10	1.40	0.043	0.055


## TO-277B Suggested Pad Layout

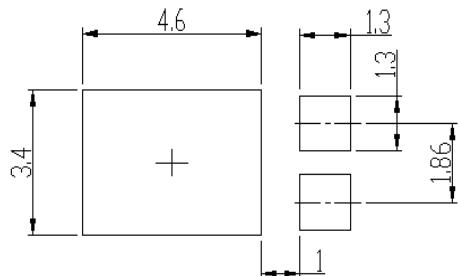

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

## Carrier Tape Specification TO-277B

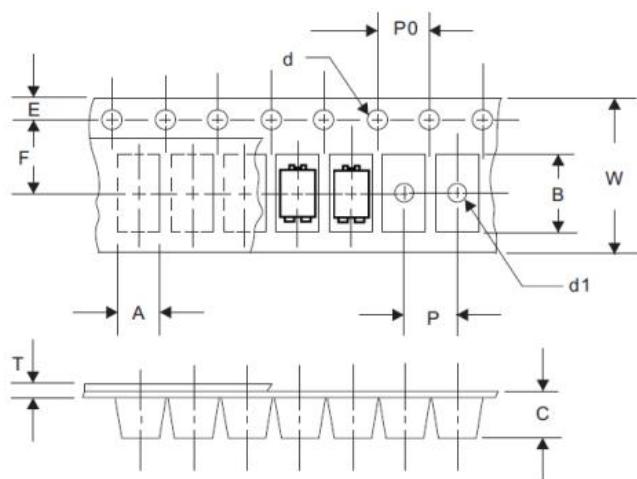

SYMBOL	Millimeters	
	Min.	Max.
A	4.28	4.48
B	6.80	7.10
C	1.30	1.50
d	1.40	1.60
d1	-	1.50
E	1.65	1.85
F	5.40	5.60
P	7.90	8.10
P0	3.90	4.10
T	0.24	0.44
W	11.70	12.30

## Ordering Information

Device	Package	Shipping
EP10100T-RL	TO-277B(Pb-Free)	5000pcs/ reel